


RC522_RFID vanaf L1,L2 met alle originele componenten, f,Zmax

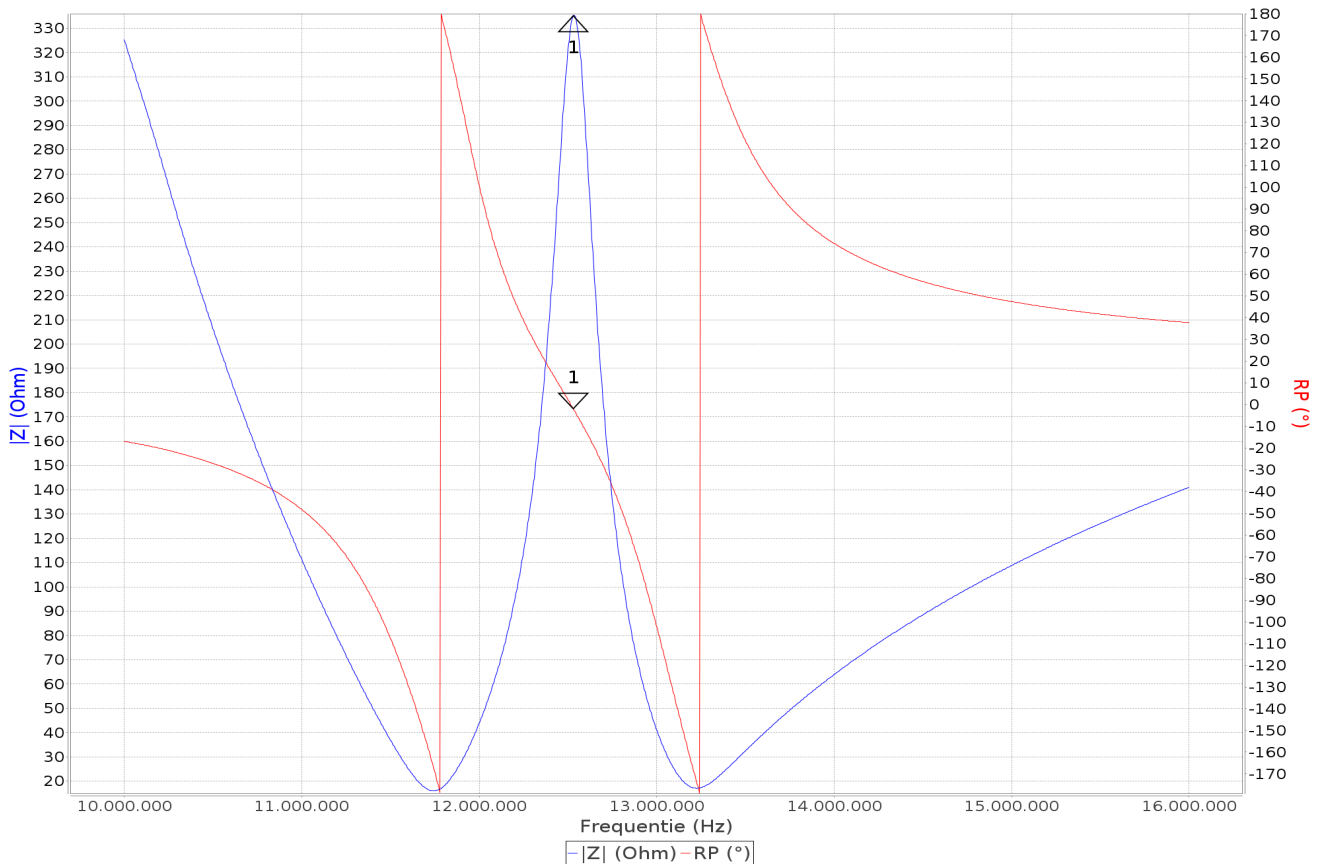

Marker	Frequentie	RL (dB)	RP (°)	Z ()	Rs ()	Xs ()	Theta	SWR
1	12.530.060	-2,60	-1,90	335,1	333,1	-36,4	-6,2	6,74:1

Commentaar:

Date: 13-1-18 15:15

Mode: Reflectie

Analyser: miniVNA Tiny / mini radio solutions - miniVNA Tiny

Scan

Start: 10000000 / 10.000.000

Stop: 15999136 / 15.999.136

Samples: 1248

Overscan: 1

Calibration

Samples: 10000

Overscan: 0

File: REFL_miniVNA Tiny_korteKabel.cal

User: lucas

Headline: RC522_RFID vanaf L1,L2 met alle originele componenten, f,Zmax

Port extension len: <not set>m

Port extension vf: <not set>

